


Dante™ 4x4 Audio Interface



Dante™ PoE

| | |
|------------------------|-------------------------------|
| Reference | CV440DP |
| Input connectors | detachable connectors |
| Output connectors | detachable connectors |
| Input impedance | > 1,8 kohms |
| Maximum inout level | +8 dBu |
| Output impedance | 200 ohms |
| Maximum output level | + 20 dBu |
| Frequency response | 20 Hz - 20 kHz (+/- 1 dB) |
| THD+N | < 0,02% |
| Power supply | PoE 802.3 af ou 12 V |
| Power consumption | 10 W max |
| Dimensions (H x W x D) | 52 x 81 x 121 mm |
| Weight | 357 g (excluding accessories) |

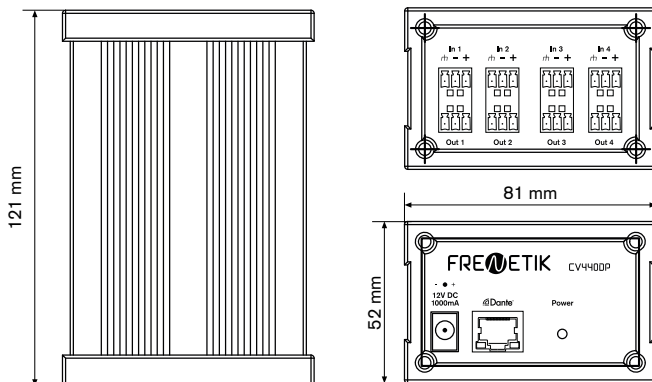

Accessorie Fastening bracket

CV440DP/F

